
Installation Manual

1: Before construction, the ignition switch of the vehicle must be turned off, the vehicle must be stopped on a flat ground and fixed to ensure the safety of the vehicle during construction. After the vehicle cools down, the construction workers must wear goggles and construction gloves. Read the Installation Manual in detail before carrying out construction. Avoid causing safety accidents.

2: Suggested tools: Goggles, gloves. Large towels, during construction, cover and protect the surrounding areas of the construction to avoid scratching the car paint, cover parts, and product surfaces.

3: Product matchingwindshield=1 bushing=2 long screws=2 Short screws=2 Gasket = 4 tool=1 Manual = 1

4: Installation steps: Disassemble the original factory windshield and all screw bushings. The brand-new windshield does not require the original factory screws and bushings. Take out the new windshield, screws, washers, bushings, tools and the instruction manual. Clean and dry the flat end face of the windshield where the mounting screws are located. Tear off the centrifugal film of the double-sided film on the bushing ②, install it on the flat end face of the windshield installation screws by pasting, and press it tightly. The installation method on both sides is the same. (Note: The inner hole of the bushing must be concentric with the screw hole). Partially tear off the protective film on the new windshield to the position where it needs to be installed, install it on the bike, align the notch of the new windshield ① with the convex pin at the windshield installation position and insert it. Take out the long screw ③ and pass it through the gasket ⑤ for installation, screw it but do not tighten it, both sides are the same. Take out the short screw ④ and pass it through the gasket ⑤ for installation, screw it but do not tighten it, both sides are the same. Adjust the windshield slightly and then tighten the screws one by one, please control the tightening torque of the screws properly. Finally, tear off all the protective films on the windshield. The installation is completed.

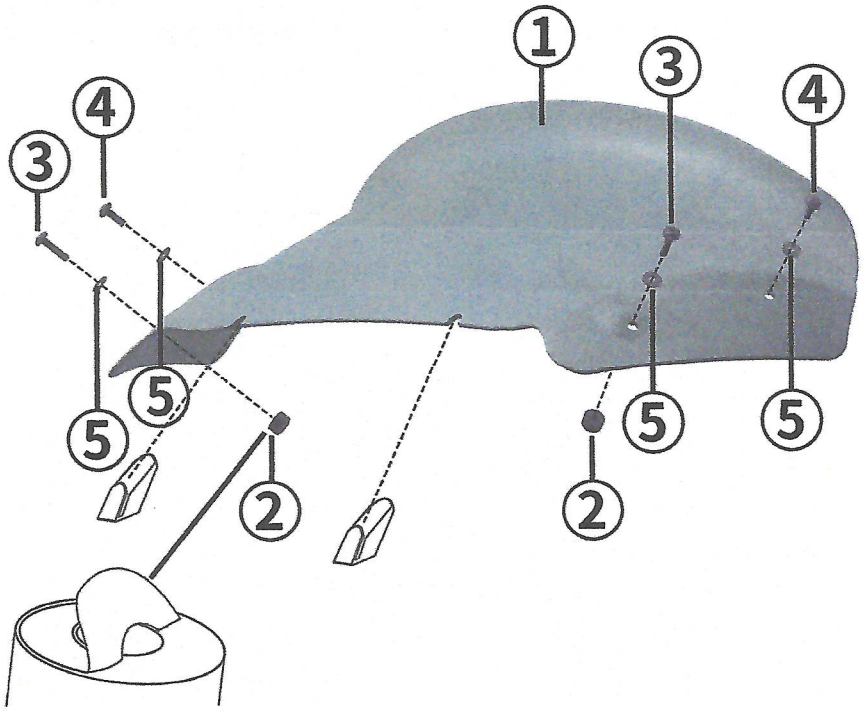

Remarks: Modified product. For ease of installation. Reserve larger tolerance holes for products. The final step during installation is before tightening the screws. Please adjust the appropriate angle.